

# Conical Spring Washers




Standard: DIN 6796

Material: Spring steel EN42J / C80/ AISI 1060 / 51CrV4 / SS420

Surface Finish: Black, Bright Polished, Zinc Electroplating, Zinc Flake, PTFE Xylan

Hardness: 420-490 HV

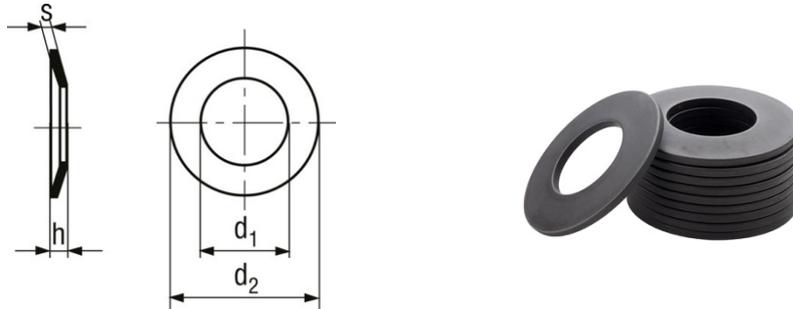

Suitable for thread dia	d1	d2	h min.	h max.	s
M2	2.2	5	0.5	0.6	0.4
M2,5	2.7	6	0.61	0.72	0.5
M3	3.2	7	0.72	0.85	0.6
M4	4.3	9	1.12	1.3	1
M5	5.3	11	1.35	1.55	1.2
M6	6.4	14	1.7	2	1.5
M7	7.4	17	2	2.3	1.75
M8	8.4	18	2.24	2.6	2
M10	10.5	23	2.8	3.2	2.5
M12	13	29	3.43	3.95	3
M14	15	35	4.04	4.65	3.5
M16	17	39	4.58	5.25	4
M18	19	42	5.08	5.8	4.5
M20	21	45	5.6	6.4	5
M22	23	49	6.15	7.05	5.5
M24	25	56	6.77	7.75	6
M27	28	60	7.3	8.35	6.5
M30	31	70	8	9.2	7