

Hex Head Screw Full Threaded





Standard: DIN 933, ISO 4017

Thread: Fully threaded

Material: Boron Steel, Stainless Steel SS304/SS316

Property class: 8.8, 10.9, 12.9

Surface Finishes: Black. Bright Polished. Zinc Electroplating. Zinc Flake. PTFE Xylan

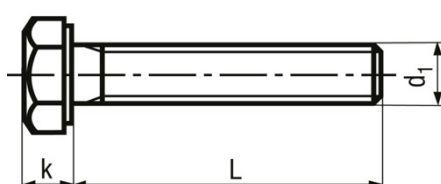

d1	L	e	k	s
M3	5	601	2	55
M3	6	601	2	55
M3	8	601	2	55
M3	10	601	2	55
M3	12	601	2	55
M3	14	601	2	55
M3	16	601	2	55
M3	20	601	2	55
M3	25	601	2	55
M3	30	601	2	55
d1	L	e	k	s
M4	14	766	28	7
M4	16	766	28	7
M4	18	766	28	7
M4	20	766	28	7
M4	22	766	28	7
M4	25	766	28	7
M4	30	766	28	7
M4	35	766	28	7
M4	40	766	28	7
M4	50	766	28	7
M5	6	879	35	8
M5	8	879	35	8
M5	10	879	35	8
M5	12	879	35	8
M5	14	879	35	8
M5	16	879	35	8
M5	18	879	35	8
M5	20	879	35	8

M5	22	879	35	8
M5	25	879	35	8
M5	30	879	35	8
M5	35	879	35	8
M5	40	879	35	8
M5	45	879	35	8
M5	50	879	35	8
M5	60	879	35	8
M6	6	1,105	4	10
M6	8	1,105	4	10
M6	10	1,105	4	10
M6	12	1,105	4	10
M6	14	1,105	4	10
M6	16	1,105	4	10
M6	18	1,105	4	10
M6	20	1,105	4	10
M6	22	1,105	4	10
M6	25	1,105	4	10
M6	30	1,105	4	10
M6	35	1,105	4	10
M6	40	1,105	4	10
M6	45	1,105	4	10
M6	50	1,105	4	10
M6	55	1,105	4	10
M6	60	1,105	4	10
M6	65	1,105	4	10
M6	70	1,105	4	10
M6	80	1,105	4	10
M6	90	1,105	4	10
M6	100	1,105	4	10

d1	L	e	k	s
M8	12	1,438	53	13
M8	14	1,438	53	13
M8	16	1,438	53	13
M8	18	1,438	53	13
M8	20	1,438	53	13
M8	22	1,438	53	13
M8	25	1,438	53	13
M8	28	1,438	53	13
M8	30	1,438	53	13
M8	35	1,438	53	13
M8	40	1,438	53	13
M8	45	1,438	53	13
M8	50	1,438	53	13
M8	55	1,438	53	13
M8	60	1,438	53	13
M8	65	1,438	53	13
M8	70	1,438	53	13
M8	75	1,438	53	13
M8	80	1,438	53	13
M8	90	1,438	53	13
M8	100	1,438	53	13
M8	110	1,438	53	13
M8	120	1,438	53	13
M10	10	189	64	17
M10	12	189	64	17
M10	14	189	64	17
M10	16	189	64	17
M10	18	189	64	17
M10	20	189	64	17
M10	22	189	64	17
M10	25	189	64	17
M10	30	189	64	17
M10	35	189	64	17
M10	40	189	64	17
M10	45	189	64	17
M10	50	189	64	17
M10	55	189	64	17
M10	60	189	64	17
M10	65	189	64	17
M10	70	189	64	17
M10	75	189	64	17
M10	80	189	64	17
M10	90	189	64	17
M10	100	189	64	17
M10	110	189	64	17
M10	120	189	64	17

d1	L	e	k	s
M12	16	211	75	19
M12	20	211	75	19
M12	22	211	75	19
M12	25	211	75	19
M12	30	211	75	19
M12	35	211	75	19
M12	40	211	75	19
M12	45	211	75	19
M12	50	211	75	19
M12	55	211	75	19
M12	60	211	75	19
M12	65	211	75	19
M12	70	211	75	19
M12	75	211	75	19
M12	80	211	75	19
M12	90	211	75	19
M12	100	211	75	19
M12	110	211	75	19
M12	120	211	75	19
M12	130	211	75	19
M12	140	211	75	19
M12	150	211	75	19
M14	20	2,449	88	22
M14	25	2,449	88	22
M14	30	2,449	88	22
M14	35	2,449	88	22
M14	40	2,449	88	22
M14	45	2,449	88	22
M14	50	2,449	88	22
M14	55	2,449	88	22
M14	60	2,449	88	22
M14	70	2,449	88	22
M14	80	2,449	88	22
M14	90	2,449	88	22
M16	20	2,675	10	24
M16	25	2,675	10	24
M16	30	2,675	10	24
M16	35	2,675	10	24

d1	L	e	k	s
M16	120	2,675	10	24
M16	130	2,675	10	24
M16	140	2,675	10	24
M16	150	2,675	10	24
M16	180	2,675	10	24
M16	250	2,675	10	24
M18	30	3,014	115	27
M18	35	3,014	115	27
M18	40	3,014	115	27
M18	45	3,014	115	27
M18	50	3,014	115	27
M18	55	3,014	115	27
M18	60	3,014	115	27
M18	70	3,014	115	27
M18	80	3,014	115	27
M18	100	3,014	115	27
M20	30	3,353	125	30
M20	35	3,353	125	30
M20	40	3,353	125	30
M20	45	3,353	125	30
M20	50	3,353	125	30
M20	55	3,353	125	30
M20	60	3,353	125	30
M20	65	3,353	125	30
M20	70	3,353	125	30
M20	75	3,353	125	30
M20	80	3,353	125	30
M20	90	3,353	125	30
M20	100	3,353	125	30
M20	110	3,353	125	30
M20	120	3,353	125	30
M20	130	3,353	125	30
M20	140	3,353	125	30
M20	150	3,353	125	30
M20	160	3,353	125	30
M20	180	3,353	125	30
M20	200	3,353	125	30
M20	220	3,353	125	30

d1	L	e	k	s
M24	90	3,998	15	36
M24	100	3,998	15	36
M24	110	3,998	15	36
M24	120	3,998	15	36
M24	140	3,998	15	36
M30	60	5,085	187	46
M30	70	5,085	187	46
M30	75	5,085	187	46
M30	80	5,085	187	46
M30	90	5,085	187	46
M30	100	5,085	187	46
M30	110	5,085	187	46
M30	120	5,085	187	46
M30	140	5,085	187	46
M30	160	5,085	187	46
M30	220	5,085	187	46