

Solid Dowel Pins

EASCO

PRESSING FORWARD

Standard: DIN 6325, ISO 8734


Product features: Tolerance: m6

Material: Steel EN31, EN19, EN8D

Material treatment: Hardened

Surface Finish: Plain

Hardness: 60 HRC

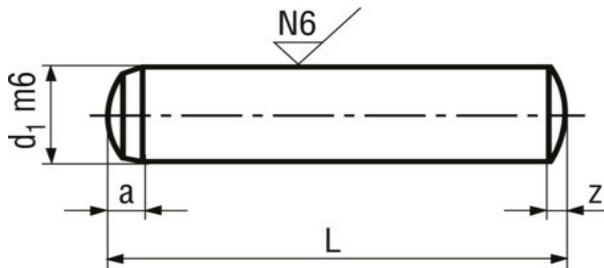

Diameter (d1)	Length (L)	a~	z~
1	4	0.48	0.15
1	5	0.48	0.15
1	6	0.48	0.15
1	8	0.48	0.15
1	10	0.48	0.15
1	12	0.48	0.15
1.5	4	0.62	0.23
1.5	5	0.62	0.23
1.5	6	0.62	0.23
1.5	8	0.62	0.23
1.5	10	0.62	0.23
1.5	12	0.62	0.23
1.5	14	0.62	0.23
1.5	16	0.62	0.23
1.5	18	0.62	0.23
1.5	20	0.62	0.23
1.5	22	0.62	0.23
1.5	24	0.62	0.23
1.5	28	0.62	0.23
1.5	30	0.62	0.23
1.5	36	0.62	0.23
1.5	40	0.62	0.23
2	4	0.78	0.3
2	5	0.78	0.3
2	6	0.78	0.3

2	8	0.78	0.3
2	10	0.78	0.3
2	12	0.78	0.3
2	14	0.78	0.3
2	16	0.78	0.3
2	18	0.78	0.3
2	20	0.78	0.3
2	22	0.78	0.3
2	24	0.78	0.3
2	28	0.78	0.3
2	30	0.78	0.3
2	36	0.78	0.3
2	40	0.78	0.3
2.5	6	0.95	0.4
2.5	8	0.95	0.4
2.5	10	0.95	0.4
2.5	12	0.95	0.4
2.5	14	0.95	0.4
2.5	16	0.95	0.4
2.5	18	0.95	0.4
2.5	20	0.95	0.4
2.5	22	0.95	0.4
2.5	24	0.95	0.4
2.5	28	0.95	0.4
2.5	30	0.95	0.4
2.5	32	0.95	0.4
2.5	34	0.95	0.4
2.5	36	0.95	0.4
2.5	40	0.95	0.4
2.5	45	0.95	0.4
2.5	50	0.95	0.4
3	5	1.1	0.45
3	6	1.1	0.45
3	8	1.1	0.45
3	10	1.1	0.45
3	12	1.1	0.45
3	14	1.1	0.45
3	16	1.1	0.45
3	18	1.1	0.45
3	20	1.1	0.45
3	22	1.1	0.45
3	24	1.1	0.45
3	26	1.1	0.45
3	28	1.1	0.45
3	30	1.1	0.45
3	32	1.1	0.45
3	34	1.1	0.45
3	36	1.1	0.45

3	40	1.1	0.45
3	45	1.1	0.45
3	50	1.1	0.45
3	60	1.1	0.45
4	6	1.4	0.6
4	8	1.4	0.6
4	10	1.4	0.6
4	12	1.4	0.6
4	14	1.4	0.6
4	16	1.4	0.6
4	18	1.4	0.6
4	20	1.4	0.6
4	22	1.4	0.6
4	24	1.4	0.6
4	28	1.4	0.6
4	30	1.4	0.6
4	32	1.4	0.6
4	34	1.4	0.6
4	36	1.4	0.6
4	40	1.4	0.6
4	45	1.4	0.6
4	50	1.4	0.6
4	60	1.4	0.6
4	80	1.4	0.6
5	8	1.7	0.75
5	10	1.7	0.75
5	12	1.7	0.75
5	14	1.7	0.75
5	16	1.7	0.75
5	18	1.7	0.75
5	20	1.7	0.75
5	22	1.7	0.75
5	24	1.7	0.75
5	26	1.7	0.75
5	28	1.7	0.75
5	30	1.7	0.75
5	32	1.7	0.75
5	34	1.7	0.75
5	36	1.7	0.75
5	40	1.7	0.75
5	45	1.7	0.75
5	50	1.7	0.75
5	55	1.7	0.75
5	60	1.7	0.75
5	80	1.7	0.75
6	10	2.1	0.9
6	12	2.1	0.9
6	14	2.1	0.9

6	16	2.1	0.9
6	18	2.1	0.9
6	20	2.1	0.9
6	22	2.1	0.9
6	24	2.1	0.9
6	26	2.1	0.9
6	28	2.1	0.9
6	30	2.1	0.9
6	32	2.1	0.9
6	34	2.1	0.9
6	36	2.1	0.9
6	40	2.1	0.9
6	45	2.1	0.9
6	50	2.1	0.9
6	55	2.1	0.9
6	60	2.1	0.9
6	70	2.1	0.9
6	80	2.1	0.9
6	90	2.1	0.9
6	100	2.1	0.9
6	120	2.1	0.9
8	14	2.6	1.2
8	16	2.6	1.2
8	18	2.6	1.2
8	20	2.6	1.2
8	22	2.6	1.2
8	24	2.6	1.2
8	28	2.6	1.2
8	30	2.6	1.2
8	32	2.6	1.2
8	34	2.6	1.2
8	36	2.6	1.2
8	40	2.6	1.2
8	45	2.6	1.2
8	50	2.6	1.2
8	55	2.6	1.2
8	60	2.6	1.2
8	70	2.6	1.2
8	80	2.6	1.2
8	90	2.6	1.2
8	100	2.6	1.2
8	120	2.6	1.2
10	14	3	1.5
10	16	3	1.5
10	18	3	1.5
10	20	3	1.5
10	22	3	1.5
10	24	3	1.5

10	28	3	1.5
10	30	3	1.5
10	32	3	1.5
10	34	3	1.5
10	36	3	1.5
10	40	3	1.5
10	45	3	1.5
10	50	3	1.5
10	55	3	1.5
10	60	3	1.5
10	70	3	1.5
10	80	3	1.5
10	90	3	1.5
10	100	3	1.5
10	120	3	1.5
12	14	3.8	1.8
12	16	3.8	1.8
12	18	3.8	1.8
12	20	3.8	1.8
12	22	3.8	1.8
12	24	3.8	1.8
12	28	3.8	1.8
12	30	3.8	1.8
12	32	3.8	1.8
12	34	3.8	1.8
12	36	3.8	1.8
12	40	3.8	1.8
12	45	3.8	1.8
12	50	3.8	1.8
12	55	3.8	1.8
12	60	3.8	1.8
12	70	3.8	1.8
12	80	3.8	1.8
12	90	3.8	1.8
12	100	3.8	1.8
12	120	3.8	1.8
14	40	3.8	2
14	50	3.8	2
14	60	3.8	2
14	80	3.8	2
14	100	3.8	2
14	120	3.8	2
16	24	4.7	2.5
16	30	4.7	2.5
16	40	4.7	2.5
16	50	4.7	2.5
16	60	4.7	2.5
16	70	4.7	2.5

16	80	4.7	2.5
16	90	4.7	2.5
16	100	4.7	2.5
16	120	4.7	2.5
20	40	6	3
20	50	6	3
20	60	6	3
20	70	6	3
20	80	6	3
20	90	6	3
20	100	6	3
20	120	6	3