


Circlips for Shafts

EASCO
PRESSING FORWARD

Manufacturing & Operating Standard : DIN 471; IS 3075-PART 3

Material: Spring steel, Stainless Steel SUS 304, Stainless Steel SUS316

Surface: Black, Bright Polished, Zinc Electroplating, Zinc Flake, PTFE Xylan

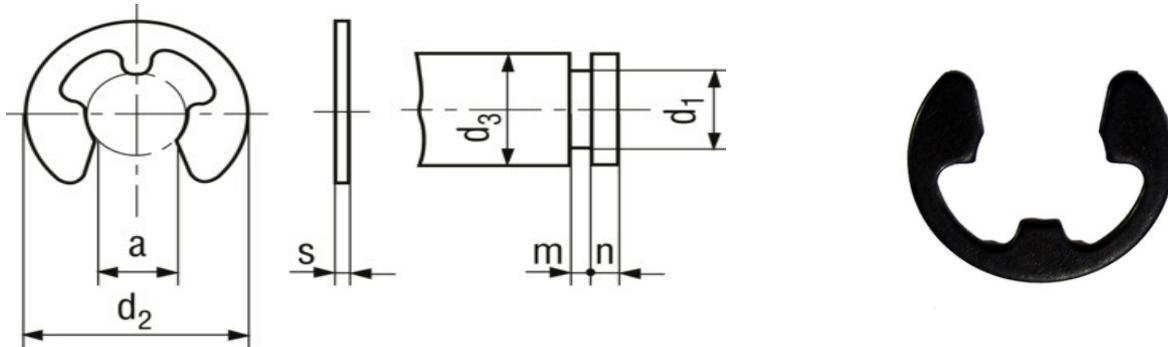

d1	d2 max. fitted	a ± IT 10 not fitted	s	Tolerance	d3 min.	d3 max.	m min.	n min.
0.8	2.25	0.58	0.2	0.02	1	1.4	0.24	0.4
1.2	3.25	1.01	0.3	0.02	1.4	2	0.34	0.6
1.5	4.25	1.28	0.4	0.02	2	2.5	0.44	0.8
1.9	4.8	1.61	0.5	0.02	2.5	3	0.54	1
2.3	6.3	1.94	0.6	0.02	3	4	0.64	1
3.2	7.3	2.7	0.6	0.02	4	5	0.64	1
4	9.3	3.34	0.7	0.02	5	7	0.74	1.2
5	11.3	4.11	0.7	0.02	6	8	0.74	1.2
6	12.3	5.26	0.7	0.02	7	9	0.74	1.2
7	14.3	5.84	0.9	0.02	8	11	0.94	1.5
8	16.3	6.52	1	0.03	9	12	1.05	1.8
9	18.8	7.63	1.1	0.03	10	14	1.15	2
10	20.4	8.32	1.2	0.03	11	15	1.25	2
12	23.4	10.45	1.3	0.03	13	18	1.35	2.5
15	29.4	12.61	1.5	0.03	16	24	1.55	3
19	37.6	15.92	1.75	0.03	20	31	1.8	3.5
24	44.6	21.88	2	0.03	25	38	2.05	4
30	52.6	25.8	2.5	0.03	32	42	2.55	4.5